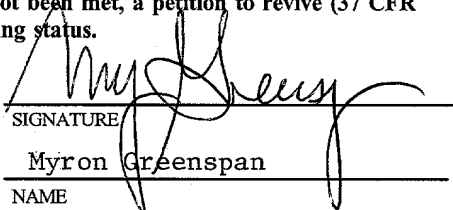


FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <div style="text-align: center; font-weight: bold;">J010-3464</div>	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <div style="font-size: 1.5em; font-weight: bold;">707049147</div>	
INTERNATIONAL APPLICATION NO. <div style="text-align: center;">PCT/DE00/03378</div>		INTERNATIONAL FILING DATE <div style="text-align: center;">September 28, 2000</div>		PRIORITY DATE CLAIMED <div style="text-align: center;">October 1, 1999 October 26, 1999</div>	
TITLE OF INVENTION <div style="text-align: center;">Multiple Speaker</div>					
APPLICANT(S) FOR DO/EO/US <div style="text-align: center;">Martin KLING</div>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below. 4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31). 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau). b. <input checked="" type="checkbox"/> has been communicated by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is attached hereto. b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau). b. <input type="checkbox"/> have been communicated by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)). 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11 to 20 below concern document(s) or information included:</p> <ol style="list-style-type: none"> 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. 13. <input type="checkbox"/> A FIRST preliminary amendment. 14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 15. <input type="checkbox"/> A substitute specification. 16. <input type="checkbox"/> A change of power of attorney and/or address letter. 17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825. 18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4). 19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4). 20. <input type="checkbox"/> Other items or information: 					

U.S. APPLICATION NO. (if known, see 37 CFR 1.53) 10-049147		INTERNATIONAL APPLICATION NO. PCT/DE00/03378		ATTORNEY'S DOCKET NUMBER J010-3464	
21. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$ 0	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	- 20 =		x \$18.00	\$ 0	
Independent claims	- 3 =		x \$84.00	\$ 0	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00	\$ 0	
TOTAL OF ABOVE CALCULATIONS =				\$890.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				+ \$445.00	
SUBTOTAL =				\$445.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$ 0	
TOTAL NATIONAL FEE =				\$445.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$ 0	
TOTAL FEES ENCLOSED =				\$445.00	
				Amount to be refunded:	\$
				charged:	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>445.00</u> to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>10-0100</u> . A duplicate copy of this sheet is enclosed.					
d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: LACKENBACH SIEGEL LLP One Chase Road Scarsdale, NY 10583 914 723 4300 Myron Greenspan; Harold Nissen; Marvin Feldman; Howard Aronson; Tom Blankinship					
			SIGNATURE  Myron Greenspan NAME 25,680 REGISTRATION NUMBER		
Dated: <u>Feb. 8, 2002</u>					

2/pst

Loudspeaker Combination

The invention relates to a loudspeaker combination comprising at least two loudspeakers of which one is preceded by a low-pass frequency filter and the other by a phase shifter.

Such a loudspeaker combination is disclosed in DE 44 47 269 C1 Figure 2. As is conventional in such loudspeaker combinations, the electric signals to be converted into acoustic signals are supplied to two loudspeakers, and the one loudspeaker is preceded by a low-pass filter, the other loudspeaker by a high-pass filter such that with the one loudspeaker the low frequencies are radiated, with the other loudspeaker the high frequencies. Since this form of frequency division and frequency separation is unsatisfactory, a phase shifter has been disposed between the high-pass filter and the treble loudspeaker, with which the phase position of the high-pitch signals is shifted by 180° . Herewith rectangular pulses are said to be reproduced satisfactorily, however, the transmission quality is unsatisfactory for music and voice transmission.

For sound transducers for the transmission of music and voice signals, in general requirements are made for specified sound pressure over wide frequency ranges, low intrinsic oscillations and low resonance, linear characteristics, a wide transmission range, low fabrication costs and, for application as insonation systems in events halls, public buildings etc., in addition the demand for uniform frequency-independent sound focusing and maximal settable radiation

angle for various application purposes with minimum dimensions. While some of these requirements can be attained with present-day transducers and use of additional electronics, no transducer is known up to now which meets all of the above requirements to a satisfactory degree.

To solve the above problems, different approaches have been realized in the past: in general, for the consumer market systems are used in which the frequency band is divided onto several bands and these are assigned to several diaphragms of different sizes. Large and heavy diaphragms transmit the bass range, while smaller, lighter diaphragms transmit the higher frequency ranges. Based on this construction, the problem of different focusing factors, phase responses and group delays of the discrete systems leads to irregularities in the radiative and transmission behavior of the overall system in the filter transition band entailed therein. Moreover, due to interferences between the systems and outside of the main radiation axis irregularities occur in the degree of transmission.

Since loudspeakers of known structural type do not fulfill the requirements for high quality of voice and sound transmission, multiple attempts have been made to improve the transmission quality by combining loudspeakers of different and like structural type with and without preceding frequency filters. In the case of these constructions the problem also arises of differing focusing factors, phase responses and group delays of the discrete systems and entailed therein irregularities in the radiative and transmission behavior of the overall system

in the filter transition band. Moreover, through interferences between the systems outside of the main radiation axis, irregularities results in the degree of transmission.

The invention avoids the disadvantages of prior art. The invention addresses the problem of providing with simple means a configuration simple of realization of such a loudspeaker combination, whose frequency response and whose radiation characteristic is significantly improved.

The invention comprises that from the (at least) two loudspeakers (at least) one radiates only low tones, (at least) another one low tones and at least tones of medium frequency, and that the phase shifter(s) in front of the loudspeakers radiating low tones as well as also at least medium frequency tones are set such that all phase shifters with respect to their phase setting are tuned to the phase position of the loudspeaker(s) radiating only lower tones. In this way, all loudspeakers radiate the low tones in like phase position, such that no interferences or similar phenomena occur.

By applying and combining these technical characteristics it is no longer necessary to utilize specifically very large and thereby also sluggish as well as expensive bass loudspeakers with diaphragms of great weight in order to attain good sound quality in the bass range, rather, it is possible to employ several identically structured loudspeakers of a cost-effective implementation, which, due to their lighter diaphragms, respond faster in order to radiate with all of these the low tones, while the medium and high tone ranges are only radiated with a

portion of the loudspeakers. A large loudspeaker area radiating in-phase transmits the low tones, while a smaller loudspeaker area radiates the medium and high frequency ranges. This yields better transmission results than those that can be achieved with loudspeaker combinations whose structural form is laid out for specific frequency ranges.

In order to be able to produce this loudspeaker combination highly cost-effectively, it is advantageous that at least one of the loudspeakers also radiating tones of the medium frequency range of this loudspeaker combination is of identical structural type and form as the loudspeaker which is preceded by the low-pass filter. In this way it is possible to utilize loudspeakers of industrial mass production and, apart from said technical advantages, also lead to economic advantages.

It is therein advantageous if all or at least several loudspeakers of this loudspeaker combination (without preceding filter and phase shifter) have identical or at least highly similar frequency characteristics.

The fundamental idea of the invention comprises employing several principally identically structured loudspeakers, allowing all or at least the major portion of the loudspeakers to radiate the low tones, wherein the loudspeakers, which, in addition to the low frequencies, also have to transmit relatively higher frequencies, are changed with respect to their phase position such that the low frequencies are radiated by all loudspeakers which radiate low frequencies, in the same phase position. A large loudspeaker area transmits low frequencies,

a smaller one medium and high frequencies. This yields better transmission results than can be attained with loudspeakers structurally laid out for separated frequency ranges.

The fundamental form of the present invention resides therein that two identically structured loudspeakers are provided in the combination and that the loudspeaker without preceding low-pass filter is preceded by a phase shifter which, with respect to its phase setting, is tuned to the phase position of the bass loudspeaker.

Hereby the technical expenditures are low, the attainable improvement of the radiation characteristics, however, is remarkable. The phase setting can be carried out in simple manner. Thereby is attained ready adaptation to the particular space to be insonated. In spite of the low expenditures, voice audibility and music suitability are significantly improved. Focusing of the sound radiation, which is largely independent of frequency, is attained without pronounced secondary lobes. A highly homogeneous and low-interference radiative behavior is obtained.

With this loudspeaker combination the loudspeaker(s) connected to the low-pass filter and the loudspeaker(s) connected to the phase shifter can be identical or very similar in their structural type and size. This yields not only price advantages when purchasing relatively large quantities but also acoustic advantages of various types. Low tones are radiated from several loudspeakers in-phase, high tones only from a single loudspeaker or a few loudspeakers of identical radiation characteristic.

With this loudspeaker combination it is entirely possible and, for relatively large systems, recommended that several loudspeakers are connected to the low-pass filter and/or several loudspeakers to the phase shifter.

For greater sound powers and improved sound quality it is of advantage if a further loudspeaker in this combination is provided which is preceded by a low-pass filter, however with higher upper pass frequency, as well as also by a phase shifter, whose phase setting is tuned to the phase position of the bass loudspeaker, and that at least one treble loudspeaker with preceding high-pass filter is additionally provided in this loudspeaker combination.

It is useful if the all-pass filter is structured entirely of passive circuit elements. But the all-pass filter can also be structured of active and passive circuit elements.

It is further of advantage if the two identical or highly similar loudspeakers, of which the one is preceded by a low-pass filter, the other by a phase shifter, are jointly accommodated with a treble loudspeaker in a common housing.

The loudspeaker combination can also be a loudspeaker series, in which the loudspeakers are accommodated in a long housing and form a loudspeaker series.

In the case of a loudspeaker series it is of advantage if the bass loudspeakers are disposed at the ends or at the outsides of the loudspeaker series.

The essence of the invention will be explained in further detail in conjunction with embodiment examples depicted in the drawing schematically in block circuit diagrams.

Therein depict:

- Fig. 1 a basic circuit with two identically structured loudspeakers, operated with passive filters,
- Fig. 2 the basic circuit with two identically structured loudspeakers, operated with active filters,
- Fig. 3 a circuit with three identical loudspeakers operated with passive filters,
- Fig. 4 the circuit with three identical loudspeakers operated with active filters,
- Fig. 5 the base circuit expanded by an additional treble loudspeaker,
- Fig. 6 the basic circuit with the twofold loudspeaker number.

The loudspeaker combination according to the invention comprises in its basic circuit shown in Figure 1 and 2 two identically structured loudspeakers 2, 3 installed in a housing 1, of which the one loudspeaker 3 is preceded by a low-pass frequency filter 4. The other loudspeaker 2 is preceded by an all-pass filter 5 with phase shifter, which, with respect to its phase setting, is tuned to the phase position of the loudspeaker 3 provided for radiating low tones. Although both loudspeakers 2, 3 are of identical structural type and form and not built specifically, or only within limits, for radiating low frequencies and, in terms of their geometric forming, are well suited for radiating medium frequencies, in this combination, provided there is suitable phase adaptation of the all-pass filter 5, a better radiation result is attained than when

utilizing different loudspeakers adapted to specific frequency ranges.

In the embodiment depicted in Figure 2, to the passive structural components have been added amplifiers 6, 7 as active structural components.

In Figure 3, relative to the basic circuit (Figure 1), the loudspeaker combination is expanded by a further loudspeaker 8, also of a structural type and form identical to loudspeakers 2 and 3. In this combination, in which the loudspeaker 3, as in the basic circuit of Figure 1, is preceded by a low-pass filter 4 and the loudspeaker 2 by an all-pass filter 5 with phase shifter, additionally, the all-pass filter 5 is preceded by a low-pass filter 9, which, however, relative to low-pass filter 4, has a higher upper pass frequency. The additional loudspeaker 8 is now preceded by two additional all-pass filters 10 and 11 with phase shifters. The all-pass filter 10 is tuned in its phase position to the low-pass filter 4 preceding loudspeaker 3, and the all-pass filter 11 is tuned to the low-pass filter 9 preceding loudspeaker 2, while the all-pass filter 5, as in the basic circuit, is tuned to the low-pass filter 4 in its phase position. Provided there is suitable phase adaptation of the all-pass filters 5, 10, 11, in this combination a better radiation result is attained than when utilizing different loudspeakers adapted to certain frequency ranges.

In this loudspeaker combination it is, for example, possible for the low-pass filter 4 to be laid out for an upper pass frequency of 250 Hz and the low-pass filter 9 for an upper pass frequency of 500 Hz.

The embodiment, depicted in Figure 4 and equipped with active structural elements, of a loudspeaker combination with three identical loudspeakers is structured slightly differently from the embodiment shown in Figure 3 with only passive structural elements.

The three loudspeakers 2, 3, 8 are each preceded by an amplifier 6, 7, 12 as the active element. The loudspeaker 3 with amplifier 7, as in the basic circuit, is only preceded by a low-pass filter 4, the loudspeaker 2 by a low-pass filter 9 and an all-pass filter 5 with phase shifter tuned, with respect to its phase position, to low-pass filter 4. Across a tap between the all-pass filter 5 and the low-pass filter 9 the loudspeaker 8 equipped with amplifier 6 is supplied, which is preceded by an all-pass filter 11. This is tuned to the low-pass filter 9, while the all-pass filter 5 is tuned to the low-pass filter 4.

In addition to the identically structured loudspeakers 2 and 3, in the embodiment of Figure 5 is installed a treble loudspeaker 14 in housing 1. It is preceded by a high-pass filter 13, which, for examples passes frequencies higher than 2 kHz. Loudspeaker 3 is preceded by low-pass filter 4 with an upper pass frequency of, for example, 500 Hz, and this is preceded by a further low-pass filter 15 with an upper pass frequency of 2 kHz. Loudspeaker 2 is connected to all-pass filter 5 with phase shifter and it to a tap between the two low-pass filters 4 and 5.

Figure 6 shows the basic circuit of Figure 1 with the twofold loudspeaker number in housing 1, in which the loudspeakers radiating the basses are disposed on the outsides of the loudspeaker series.

As filters can also be employed such which digitally process signals and audio pulses of different frequencies.

List of Reference Numbers

- 1 Housing
- 2 Loudspeaker
- 3 Loudspeaker
- 4 Low-pass frequency filter
- 5 All-pass filter with phase shifter
- 6 Amplifier
- 7 Amplifier
- 8 Loudspeaker
- 9 Low-pass frequency filter
- 10 All-pass filter with phase shifter
- 11 All-pass filter with phase shifter
- 12 Amplifier
- 13 High-pass filter
- 14 Treble loudspeaker
- 15 Low-pass filter

Patent Claims

1. Loudspeaker combination,
comprising at least two loudspeakers (2, 3), of which one (3) is preceded by a low-pass frequency filter (4) and the other (2) by a phase shifter (5),
characterized in
that of the (at least) two loudspeakers (2, 3) (at least) one (3) radiates low tones (at least) one other (2) low and at least tones of medium frequency,
and that the phase shifter(s) (5) in front of the loudspeakers (2) radiating low as well as also at least tones of medium frequency, are set such
that all phase shifters (5), with respect to their phase setting are tuned to the phase position of the loudspeaker(s) (3) radiating only lower tones.
2. Loudspeaker combination as claimed in claim 1,
characterized in
that at least one of the loudspeakers (2, 8), radiating also tones of the medium frequency range, of this loudspeaker combination is of the same structural type and form as the loudspeaker (3) with the preceding low-pass filter (4).
3. Loudspeaker combination as claimed in claim 1,
characterized in that all or at least several loudspeakers (2, 3, 8) of this loudspeaker combination (without preceding filters and phase shifter) have identical or at least highly

similar frequency characteristics.

4. Loudspeaker combination as claimed in claim 1,
characterized in that all or at least several loudspeakers (2, 3, 8) of this loudspeaker combination are of identical structural type and form.
5. Loudspeaker combination as claimed in claim 1,
characterized in that the loudspeaker combination in its base form comprises two loudspeakers (2, 3), of which the one (3) is only preceded by a low-pass frequency filter (4), such that it only radiates tones of the bass range, and the other loudspeaker (2) is preceded by a phase shifter (5) alone, such that it radiates tones of the medium as well as also of the low tone range,
and that this loudspeaker (2) radiating tones of the low as well as also of the medium tone range, is tuned in the phase setting of its bass range to the phase position of the bass loudspeaker (3).
6. Loudspeaker combination as claimed in claim 1,
characterized in
that the phase shifter (5) is an all-pass filter with a phase shifting element.
7. Loudspeaker combination as claimed in claim 1,
characterized in that additionally at least one treble loudspeaker (14) with preceding high-pass filter (13) is provided in this loudspeaker combination.

8. Loudspeaker combination as claimed in claim 1,
characterized in that in this combination, in which the loudspeaker (3) is preceded by
a low-pass filter (4) and the other loudspeaker (2) by an all-pass filter (5) with phase
shifter, a further additional loudspeaker (8), radiating, in addition to tones of medium
frequency, also tones of the bass range, with preceding all-pass filter (10) is provided,
that, in addition to the all-pass filter (5) preceding the loudspeaker (2), a low-pass filter
(9) precedes it, which, however, relative to the low-pass filter (4), has a higher upper pass
frequency,
and that the additional loudspeaker (8), in addition to the all-pass filter (10), is preceded
by a further all-pass filter (11) with phase shifter,
with the all-pass filter (10) in its phase position being tuned to the low-pass filter (4)
preceding the loudspeaker (3) and the other all-pass filter (11) to the low-pass filter (9)
preceding the loudspeaker (2),
while the all-pass filter (5), as in the base circuit, is tuned to the low-pass filter (4) in its
phase position.
9. Loudspeaker combination as claimed in claim 1,
characterized in that the loudspeakers (2, 3, 8) of this loudspeaker combination are
preceded by amplifiers (6, 7, 12) as active circuit elements,

that the one loudspeaker (3) with amplifier (7), as in the basic circuit, is only preceded by a low-pass filter (4), the loudspeaker (2) by a low-pass filter (9) and an all-pass filter (5) with phase shifter tuned in its phase position to the low-pass filter (4), that across a tap between the all-pass filter (5) and the low-pass filter (9) the loudspeaker equipped with the amplifier (6) is supplied, which is preceded by an all-pass filter (11), with this being tuned to the low-pass filter (9), while the all-pass filter (5) is tuned to the low-pass filter (4).

10. Loudspeaker combination as claimed in claim 1,

characterized in

that when employing two loudspeakers, both loudspeakers radiate low tones,

that both loudspeakers are of identical structural type and form,

that the one loudspeaker radiates only low, the other loudspeaker low tones and tones of the medium (and preferably also high) frequency ranges,

and that in both loudspeakers the same phase position of the low tones is set.

Abstract

The invention relates to a loudspeaker combination comprised of at least two loudspeakers, of which one is preceded by a low-pass frequency filter, the other by a phase shifter in the form of an all-pass filter. The invention addresses the problem of providing with simple means a configuration simple of realization of such a loudspeaker combination, whose frequency response and whose radiation characteristic is significantly improved. The invention resides therein that the other loudspeaker or the other loudspeakers is/are each preceded by at least one phase shifter, with all phase shifters being tuned with respect to their phase setting to the phase position of the loudspeakers radiating lower tones, such that all loudspeakers radiate the low tones in like phase position. The fundamental idea is herein: several primarily identically structured loudspeakers can be employed, all or at least the major portion of the loudspeakers are allowed to transmit low tones, with the loudspeakers, which, in addition to the low frequencies, also have to transmit higher frequencies, being changed in their phase position such that the low and the particular lower frequencies are radiated in identical phase position. A large loudspeaker area therein transmits the low frequencies, a smaller the medium and high frequencies. This yields better transmission results than can be attained with loudspeakers laid out in their structural form for separated frequency ranges. Hereby the technical expenditures are low, the possibly attainable improvement of radiation characteristics, however, is remarkable.

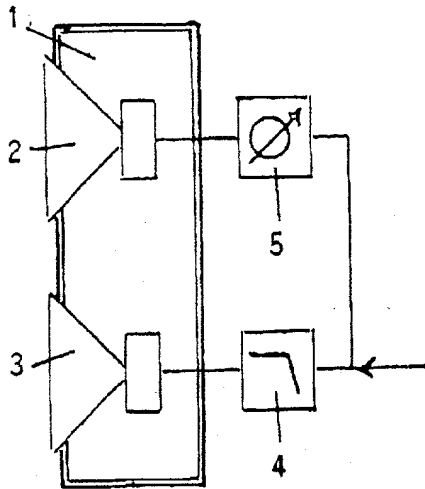


FIG. 1

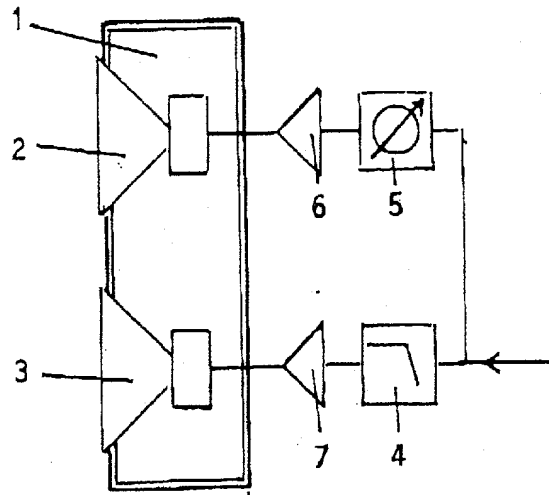


FIG. 2

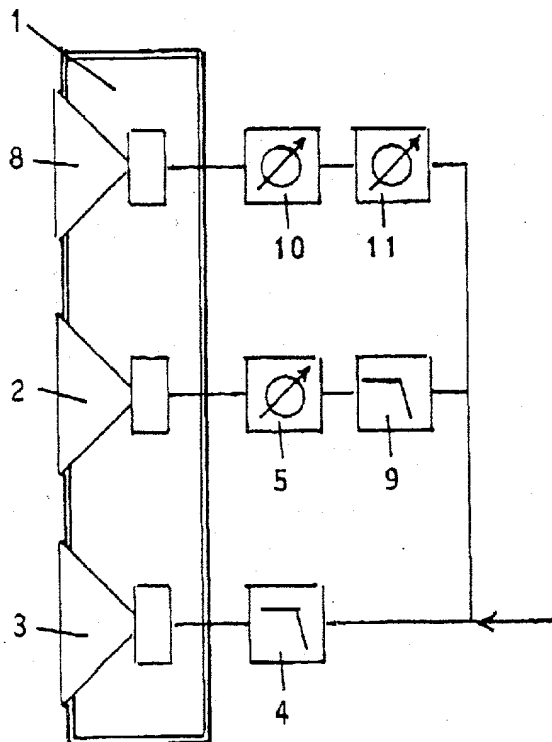


FIG. 3

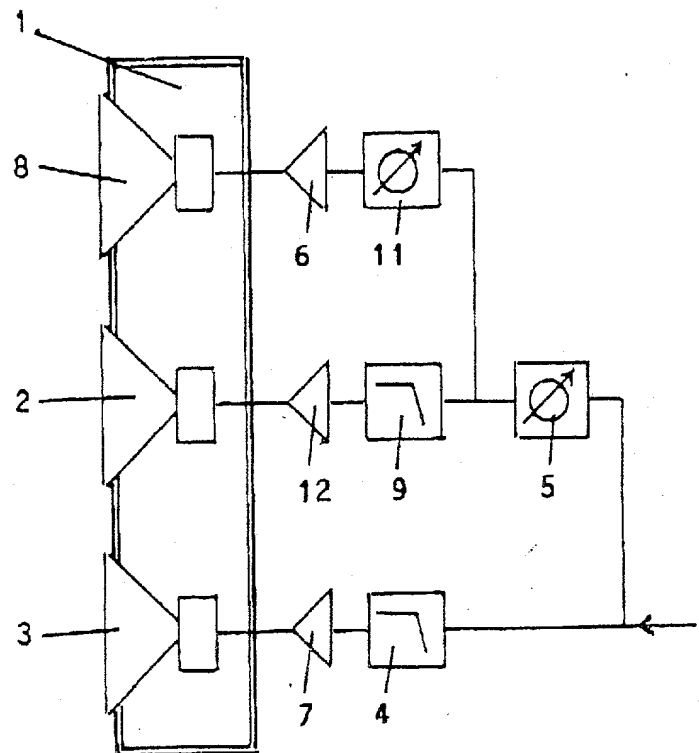
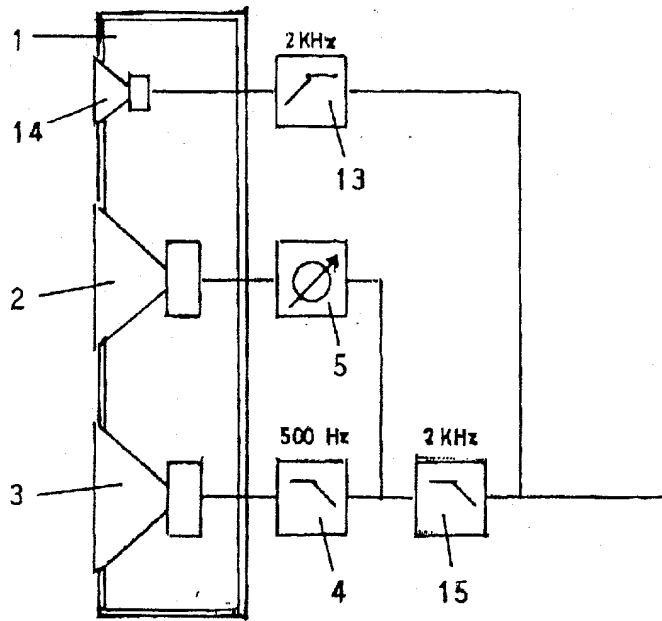
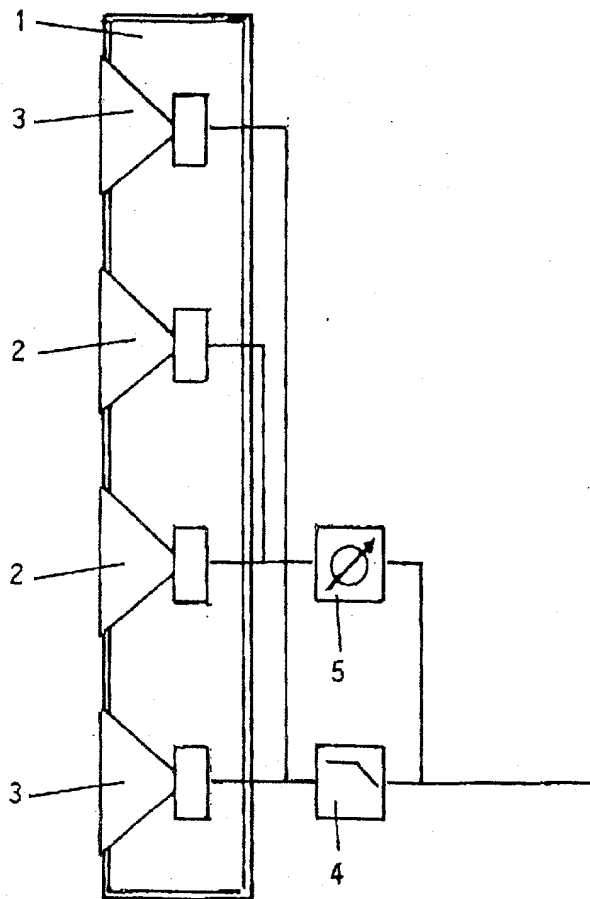


FIG. 4

FIG. 5FIG. 6

JAN-19-2002 14:09 LACKENBACH SIEGEL LLP
UNITED STATES - PATENT
DECLARATION FOR PATENT APPLICATION

914 723 4301

F. 02/02

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a design patent is sought on the invention entitled Multiple Speaker, the specification of which

(check one) ☒ is attached hereto.

☐ was filed on _____ as

Application Serial No.: _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Appln. No.	Country	Date Filed	Priority Claimed
PCT/DE00/03378	PCT	Sept. 28, 2000	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
199 47 178.9	Germany	Oct. 1, 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
199 51 406.2	Germany	Oct. 26, 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Appln. Serial No.	Filing Date	Status: Patented, Pending, Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned
		<input type="checkbox"/> Patented <input type="checkbox"/> Pending <input type="checkbox"/> Abandoned

JAN-18-2002 14:10

LACKENBACH SIEGEL LLP

914 723 4301 P.06/06

I hereby appoint the following attorney(s) and/or agent(s) to prosecute the application entitled Multiple Speaker and to transact all business in the Patent and Trademark Office connected therewith:

(6) HENRY A. MARZULLO, JR., Reg. No. 20,910; HOWARD N. ARONSON, Reg. No. 27,302; MYRON GREENSPAN, Reg. No. 25,680; MARVIN FELDMAN, Reg. No. 25,797; J. HAROLD NISSEN, Reg. No. 17,283; and THOMAS BLANKINSHIP, Reg. No. 39,909.

Address all telephone calls to Myron Greenspan, at telephone number (914) 723-4300, or to the attorney executing the last document; address all correspondence to LACKENBACH SIEGEL at One Chase Road, Scarsdale, New York 10583 U.S.A.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole Inventor Martin KLING	Citizenship GERMAN
RESIDENCE Address -- Street Junkersatrasse 14	POST OFFICE Address - Street (same as residence)
City (Zip) - 30179 Hannover DEX	City (Zip)
State or Country GERMANY	State or Country
Date 23.01.02	Signature <i>[Signature]</i>
Full Name of Second Joint Inventor	Citizenship
RESIDENCE Address -- Street	POST OFFICE Address -- Street
City (Zip) -	City (Zip)
State or Country	State or Country
Date	Signature
Full Name of Third Joint Inventor	Citizenship
RESIDENCE Address -- Street	POST OFFICE Address -- Street
City (Zip)	City (Zip)
State or Country	State or Country
Date	Signature

☐ Additional inventors are being named on separately numbered sheets attached hereto.